


# M-CLEAN

## Multi-Purpose Mechanical Cleaner & Degreaser

### Technical Data Sheet

**M-Clean** is professionally designed to safely flush away gum deposits, varnish and oil from ball bearings, bolts and chains etc. It is formulated with selected solvents to meet the challenge of deposit problems faced by today's industries.

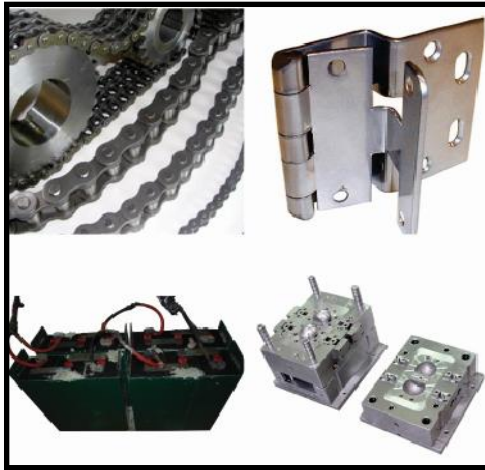

#### **FEATURES:**

- Cleaning and Degreasing Metal Surfaces before surface treatment.
- Cleaning and Degreasing of Oily, Greasy & Sticky Components.
- Easy Removal of Brake Fluid, Oil Residues, Resin Crusts & Adhesives.
- Cleaning & Degreasing of Heavy Deposits of Grease, Tars & Oils.
- Carbon dioxide propellant.
- No ozone depleting solvents
- Non staining and non-corrosive

#### **TYPICAL APPLICATIONS:**

- Ball Bearings
- Guide ways
- Bolts
- Chains
- Hinges
- Mold Dies
- Battery Terminals



**ITW India Private Limited**, Plot No. 34 to 37, Phase-2, IDA, TSIC, Pashamylaram, Medak Dist. -502 307. (35 kms from Hyderabad), T.S., India.

Telephone: +91 - 8455 - 224700, 01, 03, 04, 06, 07, 08. Facsimile: +91 - 8455 - 224705. Website: [www.itwchemin.com](http://www.itwchemin.com)

Regd. Office: ITW India Private Limited, Level 1, Lotus Plaza, 732/1, Mehrauli Gurgaon Road, Sector-14, Gurgaon - 122 001, Haryana, India.

Telephone : +91 - 124 - 4284381, Facsimile : +91 - 124 - 4284389, E-mail : [infoindia@itw.com](mailto:infoindia@itw.com)

Corporate Identity Number (CIN) : U32301HR1979PTC038643

Speciality Chemicals & Lubricants Manufacturers

# M-CLEAN

## Multi-Purpose Mechanical Cleaner & Degreaser

### Technical Data Sheet

**PROPERTIES:**

Attributes	Test Method	Specification
Appearance	AM-01	Clear water white liquid & free from foreign particles
Specific gravity @ 27°C	ASTM 1298	0.820-.840
Dry Time	Internal	30 sec
Residue on evaporation	AM-19	0.010/100 gms max
Removability with oil	AM-20	<3mins
Expulsion of one can	AM 17	completion of can

Technical data details should be considered representative or typical values only and should not be used for specification purposes.

1. Flash Point : -16°C
2. Propellant : Carbon dioxide

**PACKAGE:**

Net Fill: 400ml

**DIRECTIONS TO USE:**

- Brush away excess dirt
- Use in well ventilated area
- Hold can 6 to 8 inches away and spray directly on the surface
- Spray surface to be cleaned until all grease and dirt are thoroughly wet
- Repeat procedure for second application if needed

**Safety Information:** This product is unlikely to present any significant health or safety hazard when used as recommended. Good standards of personal and industrial hygiene are to be maintained by the user - (Refer Safety Data Sheet before use).

**Disclaimer:** Information contained in this data sheet is based upon the properties and applications of use known to us. However, generally no legal liability may be deducted from such information



**ITW India Private Limited**, Plot No. 34 to 37, Phase-2, IDA, TSIC, Pashamylaram, Medak Dist. -502 307. (35 kms from Hyderabad), T.S., India.  
Telephone: +91 - 8455 - 224700, 01, 03, 04, 06, 07, 08. Facsimile: +91 - 8455 - 224705. Website: [www.itwchemin.com](http://www.itwchemin.com)

Regd. Office: ITW India Private Limited, Level 1, Lotus Plaza, 732/1, Mehrauli Gurgaon Road, Sector-14, Gurgaon - 122 001, Haryana, India.  
Telephone : +91 - 124 - 4284381, Facsimile : +91 - 124 - 4284389, E-mail : [infoindia@itw.com](mailto:infoindia@itw.com)

Corporate Identity Number (CIN) : U32301HR1979PTC038643

Speciality Chemicals & Lubricants Manufacturers